

STA1140 Series 400 W, C-Band Antenna Mount TWTA



STA1140 Series 400 W, C-Band Antenna Mount TWTA

The STA1140 range of C-Band TWT amplifiers from SpacePath Communications provide over 350W of output power in a compact, lightweight, rugged, weatherproof, antenna mount enclosure.

The advanced packaging and cooling techniques (Stellar Cool™, patent pending) enable the unit to operate in extreme environmental conditions from direct rain to direct sunlight. The amplifiers can be simply deployed anywhere in the world, are user-friendly, and incorporate a comprehensive remote control facility as standard, including RS485 and Ethernet options.

The HPA incorporates a high efficiency multi-collector TWT powered by an advanced power supply built on over 30 years of experience in the design and manufacture of satellite amplifiers. The company's products have an enviable reputation for performance, robust quality and reliable service.

The STA1140 is available with a wide range of options and accessories, backed by round-the-clock, worldwide technical support.

OPTIONS


- Integral solid-state amplifier (SSA)
- Gain control (requires SSA)
- L-band block upconverter
- Lineariser
- Break-out link for upconverter

FEATURES

- Advanced cooling design (Stellar Cool™, patent pending) enables operation at +55 °C and in direct sunlight.
- Weatherproof antenna mount construction allows exposed mounting.

- CE compliant
- cETLus listed
- CB certified
- Wide input voltage range can operate from mains supplies worldwide
- Redundant control contains control and drive circuits for 1:1 redundancy
- Stand-alone setting automatically sequences to transmit mode
- Round-the-clock hotline support
- Wide range of accessories including: controllers, waveguide networks, cable assemblies.

BLOCK DIAGRAM

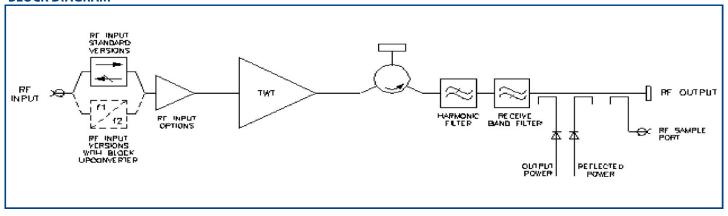

DEDECORMANICE (Mithaut Unconvertor)		MECHANICAL			
PERFORMANCE (Without Upconverter)			O ka (EE lb) tun		
Frequency range:		Weight			
standard – CC1 5.850 to 6.		Dimensions			
extended – CC2 5.850 to 6.		Coolingint	egrai forced-air		
extended – CC3 5.850 to 6.					
extended – CC4 5.850 to 7.		CONNECTORS			
extended – CC5 5.725 to 6.	725 GHz	RF input	N-type female		
Output power:		RF outputCPR137G with 10-32 UNF 2B to			
TWT output flange40		RF sample port	N-type female		
HPA rated output 35	0 W min	Prime powerITT Cannon - CGL0.	2A20-3P-E1B-B		
Gain:		Control interface62G	B-12E-2041-PN		
at rated power (C option)4	5 dB min				
at rated power (A, D, Z option)	0 dB min	Note: Mating connectors for the mains supply and contr	rol interface are		
SSG Prated – 10 dB (C option) 5		supplied.			
SSG P _{rated} – 10 dB (A, D, Z option)					
Attenuation range (D, Z option)		ENVIRONMENTAL			
Gain variation:	.s ab iiiii	For operation outside these parameters, refer to SpacePa	ath		
full band2.	5 dR may	Communications for guidance.	atti		
over any 40 MHz band	dB max	Operating temperature (see note 1)40 to	+55 °C		
slope	dB/MHz may	Derating			
Gain stability 24hrs (constant drive,	o ab/ivii iz iiiax	Defating 2 C/300 in a	(3.6 °F/1000 ft)		
		Color gain 1120			
temperature and load)		Solar gain	W/m ₂		
Gain stability over full operating temperature 2.0	de max	Storage temperature40 to +80	°C		
Intermodulation (two equal carriers)		Relative humidity (condensing) 100	%		
with total output = P_{rated} – 4 dB:		Altitude:			
options C, A, D18		operating 4.5 km (15,000 ft)	max		
performance with linearised option, Z24		non-operating12 km (40,000 ft)	max		
Harmonic output60		Vibration: BS EN 60068-2-64 test Fh,			
AM to PM conversion at Prated – 6 dB2.5	°/dB	Shock:IEC Publication 68-2-27 Part	: 2 Test Ea, 25 g		
Noise power:		EMC:			
transmit band70	dBW/4 kHz max	EN61000-6-3:2001 (Emissions)			
receive band (3.2 – 4.2 GHz)150	dBW/4 kHz max	EN61000-6-2:2001 (Immunity)			
Residual AM:		FCC CFR47 Part 15B			
<10 kHz50	dBc max				
10 kHz< f <500 kHz20(1.5+log f		CE CERTIFIED			
>500 kHz		EMC Directive 89/336/EEC, Low Voltage Directive 73/23/	FEC.		
Group delay:	3.5 6 111.6.7.				
linear	1 ns/MHz	NOTES			
parabolic 0.005			atwaan 180		
ripple		11 11, 3			
	ns p-p		iperature is		
continuous	Phase noise: +50 °C.				
		2. Safety applies for operating altitude up to 2000 m	i and operating		
AC fundamental50		temperature up to $+50$ $^{\circ}$ C.			
sum of all spurs47	dBc				
Input VSWR (operating)1.3:1	max				
Output VSWR (non-operating) 1.3:1	max				
Load VSWR, no damage 2.0:1	max				
ELECTRICAL					
Prime powersingle phase, line-neutra	l or line-line				
Voltage99 to 265					
Frequency 47 to 63					
Power requirement 1500					
Power factor 0.95					


CONTROLS

Туре	Function		
REMOTE CONTROL	Off Standby Transmit RF inhibit	High Power Alarm Set* Low Power Alarm Set* Auto Redundancy Control* RF Switch Control* Gain Control* (when fitted)	
REMOTE STATUS/MONITOR	Off Warm-up Standby Transmit Fault Summary Reflected Power External interlock TWT too hot Mean Helix Current Peak Helix Current High Power Alarm* Low Power Alarm*	Output Power Monitor* Reflected Power Monitor* Helix Current Monitor* Helix Voltage* Collector Voltages* Heater Voltage* Heater Gurrent* Elapsed Hours*	
INTERFACES Serial User	RS-422/485, Optional Ethernet Dry Relay Contact		
Other Features	Auxiliary Output Voltage Redundant system & waveguide switch drive 'Stand Alone' setting for automatic power up		

Note: Controls/Monitoring marked* are only available via Serial Interface.

OPTIONS

Extensive options are offered with the STA1140 and include; integral pre-amplifiers, gain control, linearisers and block upconverters. The options are defined by adding to the base number as shown below:

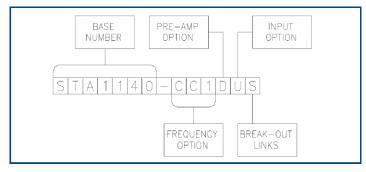

(Consult SpacePath Communications for availability of options).

Frequency Options

The STA1140 is offered in four frequency bands:

CC1 - 5.850 - 6.425 GHz

CC2 - 5.850 - 6.650 GHz

CC3 - 5.850 - 6.725 GHz

CC4 - 5.850 - 7.025 GHz

CC5 - 5.725 - 6.725 GHz

Pre-Amp Option

The pre-amp option can be selected from any of the following: C - No pre-amp (typical SSG 52 dB).

A - Integral solid-state amplifier (typical SSG 78 dB).

D - As option 'A' but includes an attenuator to provide 25 dB (min.) of gain control.

Z - Integral lineariser that improves the linearity of the HPA, providing a C/I of typically –26 dBc at 4 dB OPBO. The lineariser also incorporates the pre-amp and gain control options. (Consult SpacePath Communications for availability).

Input Option

The STA1140 can be offered with an L-Band Block Upconverter. Specify:

N - Standard RF

U - L - C-Band Block Upconverter (see page 4)

Note: The upconverter requires the inclusion of either the 'D' or 'Z' options. (Consult SpacePath Communications for availability).

Break-Out Links

Available only with the upconverter option, this enables bypassing of the upconverter and can be used for monitoring, set-up, redundant switching etc. Specify 'S' forBreak-Out Links (leave blank if not required).

ACCESSORIES

The STA1140 is supplied with an operation manual, prime power connector mating part, interface connector mating part and air cowls. Additional accessories include:

• N6080 Override Controller

Provides automatic power-up for 'emergency' situations.

SPC1U01 1:1 Control Unit

Provides control of 2 HPA's in 1:1 switch configuration. (The waveguide switch network can also be supplied).

Cable Assemblies

For connecting STA1140 to controllers and waveguide switches. Refer to data sheet A1A-Stellar_Cables.

DAS563750AA

Additional mains connector parts.

• DAS563751AA

Additional interface connector parts.

For more information on accessories, contact SpacePath Communications.

PERFORMANCE WITH INTEGRAL BLOCK UPCONVERTER

0	
Output frequency range:	C.I.
option – CC1 5.850 to 6.425	GHz
option – CC2 5.850 to 6.650	GHz
option – CC3 5.850 to 6.725	GHz
option – CC4 5.850 to 7.025	GHz
option – CC5 5.725 to 6.725	GHz
L-band input:	
frequency range option CC1 950 to 1525	MHz
frequency range option CC2 950 to 1750	MHz
level 10	dBm max
LO frequency (option CC1/CC2)4.9	GHz
External reference (see note):	
frequency 10	MHz
level3 to +7	dBm
impedance 50	Ω
Output power:	
TWT output flange 400	W min
HPA rated output350	W min
Gain:	
at rated power (D, Z option)70	dB min
SSG P _{rated} – 10 dB (D, Z option)	dB min
Attenuation range (D, Z option)	dB min
Gain variation:	ab iiiii
full band4.0	dB max
over any 40 MHz band 1.5	dB max
slope	dB/MHz max
Gain stability 24hrs (constant drive,	GD/WII IZ III dX
temperature and load)	dB max
Gain stability over full operating temperature 2.0	dB max
Intermodulation (two equal carriers) with total output =	
	dBc max
options C, A, D18 performance with linearised option, Z24	dBc max
Harmonic output	dBc max
AM to PM conversion at Prated –6 dB	°/dB
Noise power:	-IDW//4 Id I= /
transmit band70	dBW/4 kHz max
receive band (3.2 – 4.2 GHz)150	dBW/4 kHz max

iHz	Residual AM >100 kHz from carrier Group delay:	60	dBc max
iΗz	linear	0.01	ns/MHz
iHz	parabolic		ns/MHz²
iHz	ripple	0.5	ns p-p
iΗz	Phase noise:		
	Continuous	meets IESS phase	noise profile
۱Hz	AC fundamental		dBc
۱Hz	Sum of all spurs		dBc
าลx	Input VSWR (non-operating)		max
SHz	Output VSWR (non-operating)	1.3:1	max
	Load VSWR, no damage	2.0:1	max

Note: the BUC can be operated without the external reference, typical frequency stability ±0.25 ppm.

HEALTH AND SAFETY HAZARDS

Stellar satellite amplifiers are safe to handle and operate provided that the relevant precautions are observed. SpacePath Communications does not accept responsibility for damage or injury resulting from the use of electronic devices it produces.

High Voltage

Dangerous voltages are present within the TWT amplifier when operating normally. However, the equipment is designed so that personnel cannot come into contact with high voltage circuits unless covers are removed.


RF Radiation

All RF connectors must be correctly fitted before operation.

Beryllia

The TWT in the amplifier contains Beryllium Oxide ceramic parts. These are not accessible unless the TWT casing is damaged. Consult SpacePath Communications regarding the disposal of damaged or life expired tubes.

Outline

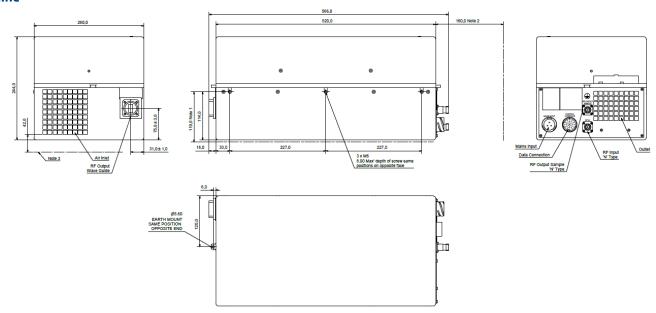

Whilst SpacePath Communications has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. SpacePath Communications accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.