



## M7 Series Advanced IF & L-Band Troposcatter Modem

### Modular Tropo Modem

#### KEY FEATURES

- L-Band and IF Selectable
- Frequency Agile 50-180, 950-2250 MHz, 1 Hz Steps
- 256 kbps to 102 Mbps, Data Rate
- 256 ksps to 39.9999 Msps, Symbol Rate
- 2 Carrier Modulator in 1/2 RU
- Dual-Diversity Modem in 1/2 RU
- Quad Diversity Modem in 1 RU
- Compact and Lightweight
- FlexLDPC Multi Block Sizes & Code Rates
- BPSK/QPSK/8PSK/16APSK
- Auto Spectral Inversion Correction
- Multi-Channel RX-Level Balancing
- Automatic Frequency Offset Correction
- Interleaver/Deinterleaver up to 200 ms
- ACM
- Ethernet Interface
  - Layer 2 Bridge, Switch Based
  - 5-Port with additional SFP Port
  - QoS and VLAN Support
- Front Panel Menu Control
- State-of-the-Art Web Browser (Local and Remote)
- SNMP Control and Monitor
- Over the Air MCC Channel for Far End M&C

#### APPLICATIONS

- Fixed and On-the-Move
- Oil and Gas - Offshore Platforms
- Supports C-band, Ku-band X-Band
- Just Beyond Line of Sight Microwave



Half-Rack M7 Tropo Dual-Output Modulator with Independent Frequency Control



Half-Rack M7 Tropo Dual-Diversity Modem



Half-Rack M7 Tropo Quad Diversity Demod



M7 Tropo Dual Diversity Modem



M7 Tropo Modulator with Quad Diversity Modem

The M7 Tropo Modem is Datum' Systems' latest technical achievement with the most modern digital troposcatter modem and features available. The advanced features include Dual or Quad diversity with a Maximum Data Rate up to 102 Mbps of throughput, and FlexLDPC Forward Error Correction (FEC). The M7 Tropo has advanced monitor and control (M&C) Capability for local and remote modem M&C with complete access to the modem parameters through the Web Browser, SNMP, and Serial interfaces.


**Compact Modular Design** – The modern M7 Platform dramatically reduces the weight and footprint over other available troposcatter modems to a single 1-RU Rack Space, saving expensive rackspace and weight. The Modulator, Quad Diversity Demod and the Dual-Diversity units all fit within a single 1/2 RU space, making it the world's most modular platform available. A complete Quad-Diversity tropo modem fits within a single 1 RU Rack Space, and weighs less than 10 pounds. The Modulator and Demodulator units can be used as stand-alone for one-way traffic.

**Advanced FlexLDPC FEC** – With superior coding gain and flexibility, FlexLDPC provides superior error correction performance and an unparalleled amount of granular code rates and block size selections.

**Superior Multi-Path Performance** – The M7 Tropo Series offers the highest dispersion tolerance available.

**Two Sigma over Tau Performance** - The M7 Tropo uses a new and different patented technique to equalize troposcatter channels, and is able to equalize channels that are much more dispersive than usually encountered on tropo links. The usual measure of the dispersion of a tropo channel is the delay spread over the symbol period, "Two Sigma/Tau" or  $(2\sigma/\tau)$ . Typical tropo modem specifications available today are based on  $2\sigma/\tau$  operation up to 3, or in a rare case up to 6. The M7 Tropo is highly insensitive to this parameter and the performance improves for higher  $2\sigma/\tau$ . As data rates go up, the symbol period goes down, making  $2\sigma/\tau$  larger. This important design aspect allows the Datum Tropo Modem to scale much better than other tropo modem types.

**Network Interface (N7)** - The N7 is a Layer 2 Bridge-only Switch based 5 Port Gigabit Ethernet interface, which includes an additional SFP Port for an Optic Fiber connection. The N7 also supports optimal QoS, VLAN operation and Jumbo Frames.

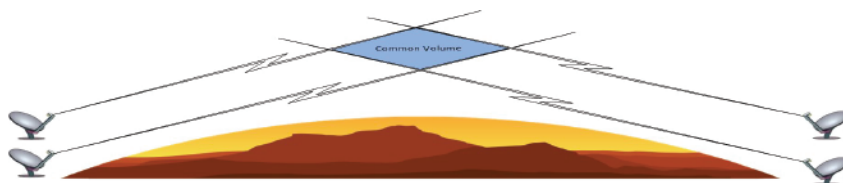

| SPECIFICATIONS     |  |
|--------------------|--|
| Operating Modes    | Dual and Quad Diversity<br>FlexLDPC, Flexible Block and Code Rates, Low Latency<br>Async Low Overhead Channels<br>Remote Modem Control Channel |
| Symbol Rate Range  | 256 ksp/s to 39.9999 Msps (1 sps steps)  |
| Data Rate Range    | 256 kbps to 102 Mbps (1 bps steps)   |
| FreqTuning Range   | L-band = 950-2250 MHz (1 Hz steps)<br>IF = 50-180 MHz (1 Hz steps)   |
| Demodulation Types | BPSK, QPSK, 8PSK, 8APSK, 16APSK  |
| FEC Options        | FlexLDPC Block Size: 2k, 4k, 8k, 16k<br>Code Rates: 1/2, 4/7, 2/3, 8/11, 4/5, 16/27, 16/19, 8/9, 16/17   |

| MODULATOR                      |   |
|--------------------------------|---|
| Transmit Carriers              | 1 or 2  |
| Data Rate Max                  | 102 Mbps  |
| Symbol Rate Max                | 39.9999 Msps  |
| Output Bandwidth               | 90 MHz<br>L-band: 950 MHz to 2250 MHz<br>Center Settable between 986 MHz and 2214 MHz (L-Band)<br>IF: 50 MHz to 180 MHz<br>Center Settable between 86 MHz and 164 MHz (IF)  |
| Output Level                   | L-Band or IF Output Power:<br>+5 dBm to -35 dBm (30Msps)<br>-10 dBm to -50 dBm (1Msps)<br>L-Band or IF Power Spectral Density<br>-70 dBm/Hz to -110 dBm/Hz  |
| Output Level Accuracy          | ±0.5 dB   |
| Output Impedance               | 50 Ohms SMA; L-Band or IF   |
| Output Return Loss             | >16dB; L-Band or IF   |
| Output Off Isolation           | >60 dB  |
| Output Spurious Single Carrier | <-60 dBc / 10 kHz BW (Modulated Carrier)  |
| Phase Noise                    | Phase Noise Density mask<br>Offset = 10 Hz <-33 dBc/Hz<br>Offset = 100 Hz <-63 dBc/Hz<br>Offset = 1 KHz <-73 dBc/Hz<br>Offset = 10 KHz <-83 dBc/Hz<br>Offset = 100 KHz <-93 dBc/Hz<br>Offset = 1 MHz <-103 dBc/Hz<br>Integrated <1 Degree RMS |
| Mod Roll-Off Factor %          | 5,10,15, 20, 25, 30, 35,40 (%)  |

| MODCOD COMBINATIONS AND MAX DATA RATE |            |
|---------------------------------------|------------|
| QPSK LDPC-1/2                         | 36.64 Mbps |
| QPSK LDPC-4/7                         | 41.87 Mbps |
| QPSK LDPC-2/3                         | 48.85 Mbps |
| QPSK LDPC-8/11                        | 53.30 Mbps |
| QPSK LDPC-4/5                         | 58.63 Mbps |
| 8PSK LDPC-16/27-16k                   | 65.14 Mbps |
| 8PSKLDPC-2/3-16k                      | 73.29 Mbps |
| 16APSK LDPC-4/7-16k                   | 83.76 Mbps |
| 16APSK LDPC-2/3-16k                   | 97.72 Mbps |
| 16APSK LDPC-8/11-16k                  | 102 Mbps   |
| 16APSK LDPC-4/5-16k                   | 102 Mbps   |
| 16APSK LDPC-16/19-16k                 | 102 Mbps   |
| 16APSK LDPC-8/9-16k                   | 102 Mbps   |
| 16APSK LDPC-16/17-16k                 | 102 Mbps   |

| DEMODULATOR               |   |
|---------------------------|---|
| Diversities               | Dual per card<br>Quad with 2 demod cards  |
| Data Rate Max             | 102 Mbps  |
| Symbol Rate Max           | 39.9999 Msps  |
| Input Bandwidth           | 90 MHz<br>L-band 950 MHz to 2250 MHz<br>Center Settable between 986 MHz and 2214 MHz<br>IF 50 MHz to 180 MHz<br>Center Settable between 86MHz and 164 MHz |
| Receive Carriers          | 2 for Dual Diversity<br>4 for Quad Diversity  |
| Input Acquisition Range   | 12.5 Hz @ 1Msps (SR/80,000)   |
| Minimum Input Level       | -45 dBm over 72 MHz (PSD = -124 dBm/Hz)   |
| Maximum Input Level       | 0 dBm over 72 MHz (PSD = -79 dBm/Hz)  |
| Maximum Total Power       | +10 dBm   |
| Receive Carrier Input Pwr | InputPSD+10*log10(SR) +/-10 dB  |
| Receive Acquisition Time  | Typical < 5 seconds at 1 Msps   |
| Input Impedance           | 50 Ohms SMA; L-band or IF   |
| Input Return Loss         | >16dB; L-band or IF   |
| Input Phase Noise         | Same as Modulator   |
| Demod Roll-Off Factor %   | 5,10,15, 20, 25, 30, 35,40 (%)  |

| NETWORK INTERFACE (N7)   |                                    |
|--------------------------|------------------------------------|
| Ethernet Interface Ports | 5 Ports (RJ-45), 1 Port SFP        |
| 5 Port Interface         | 10/100 BaseT, Gig Ethernet (RJ-45) |
| SFP Port                 | Optional Gigabit or Optic Fiber    |
| Ethernet Protocol        | Layer 2 Switched Bridge Only       |
| Features                 | QoS and VLAN Selectable            |


| MONITOR AND CONTROL       |                                   |
|---------------------------|-----------------------------------|
| Remote Control Interfaces | RS-232, RS-485, SNMP, Web Browser |
| Alarm Outputs             | RS-232, RS-485, SNMP, Web Browser |

| ENVIRONMENTAL AND PHYSICAL  |  |
|-----------------------------|--|
| AC to DC Adapter (Std)      | Input 90-240 VAC, Output 24 V 65 W max                               |
| DC Input (Rear of Unit)     | 8 to 36 VDC, -48 VDC Optional  |
| Operating Temperature Range | 0°C to 50°C, 99% humidity, non-con                                   |
| Storage Temperature         | -20°C to +70°C, 99% humidity, non-con                                |
| Size                        | 8.5" (W) x 11" (D) x 1.75" (H), (2 Units in 1 RU for Quad Diversity) |
| Weight                      | < 10 lbs, fully configured   |


| CERTIFICATION AND COMPLIANCE |   |
|------------------------------|---|
| CE Certified for:            | MIL-STD-810G<br>ETSI EN 301 489-1 V1.9.2<br>EN50022 Emissions<br>EN50024 Immunity<br>EN60950 (Safety) |
| RoHS                         | Meets RoHS lead-free standards  |

\* Specifications subject to change without notice


## M7 Web GUI Constellation Monitoring

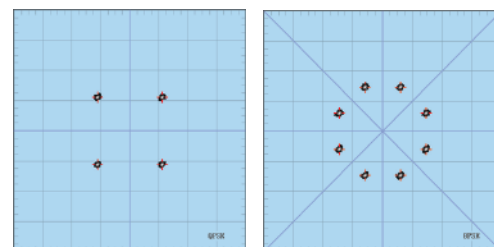

QPSK No Multipath 8PSK

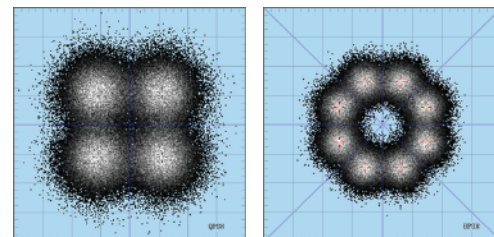

with Multipath and Noise

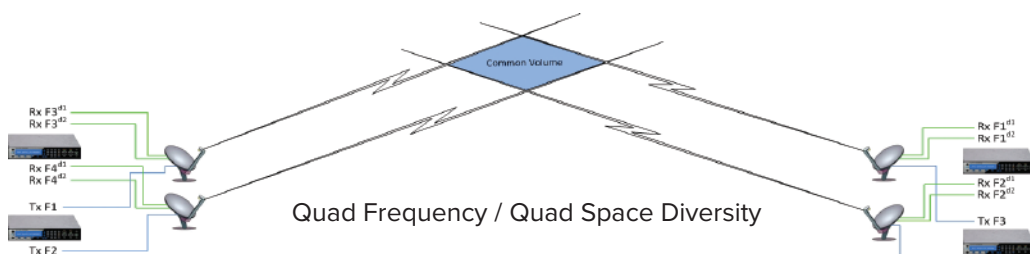

Available in Sand, Desert Camo or Army Green

