

FEATURES

**Ultralinear
Lightweight
High Efficiency
Broadband**



STA5940P Ka series 400W Antenna Mount HPA

The STA5940P K series HPA provides ultra linear, high efficiency performance in a compact, lightweight, rugged, weatherproof, antenna mount enclosure. The advanced packaging and cooling techniques enable the unit to operate in extreme environmental conditions from direct rain to direct sunlight. The amplifiers can be simply deployed anywhere in the world, are user-friendly and incorporate a comprehensive remote control facility as standard, including RS485, RS232 and Ethernet options.

The HPA incorporates a high efficiency multi-collector TWT powered by an advanced power supply built on over 30 years of experience in the design and manufacture of satellite amplifiers.


The company's products have an enviable reputation for performance, robust quality and reliable service.

The STA5940P K is available with a wide range of options and accessories, backed by worldwide technical support.

Features

- Advanced cooling design enables operation at +60°C and in direct sunlight
- Weatherproof antenna mount construction allows exposed mounting
- Ethernet/SMP/Webpage GUI interfaces
- Broadband – high efficiency operation
- Uplink Power Control
- CE compliant
- Wide input voltage range - can operate from mains supplies worldwide
- Redundant control - contains control and drive circuits for 1:1 redundancy
- Stand-alone setting - automatically sequences to transmit mode
- Wide range of accessories including: Controllers, waveguide networks, cable assemblies

BLOCK DIAGRAM

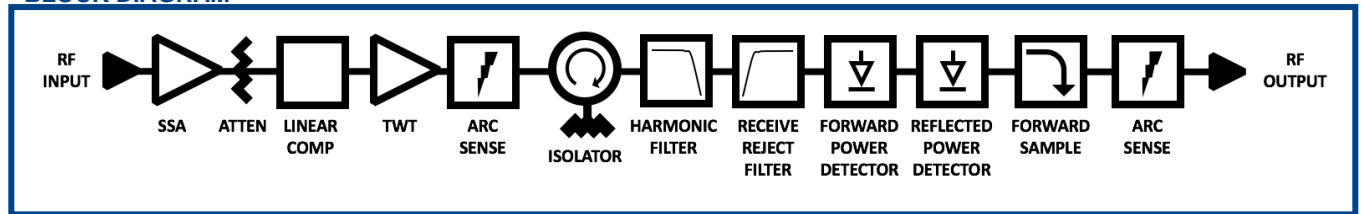

RF Performance:

| | |
|---|---------------------------------|
| Frequency KK1 | 22.5 – 23.5 GHz |
| Bandwidth | 1000 MHz |
| Output Power (for load VSWR ≤ 1.5:1) | |
| TWT Power, PEAK / CW | 56.0 / 54.8 dBm (400 W / 300 W) |
| Rated CW (flange) | 54.0 dBm (250 W) typical |
| Linear, P _{LIN} | 51.4 dBm (140 W) |

Gain

| | |
|--|--------------------|
| Gain | ≥ 70 dB |
| Variation, 250 MHz, ΔG _{250MHz} | ≤ 1.0 dB peak-peak |
| Variation, 1000 MHz, ΔG _{1000MHz} | ≤ 2.5 dB peak-peak |
| Slope, ΔG _{SLOPE} | ± 0.04 dB/MHz |
| Gain Stability vs. Time @ constant drive & temp | ± 0.25 dB/24 hours |
| Gain Stability vs. Temperature @ constant drive & frequency | ± 1.0 dB |
| Adjustment range, G _{ADJ} | 30.0 dB typical |
| Adjustment step size | 0.1 dB |

Linearity

| | |
|---|--|
| AM/PM @ P _O ≤ P _{LIN} - 1dB | ≤ 1.5°/dB |
| Inter-modulations (IMD) 2-tone | ≤ -28 dBc @ P _O ≤ P _{LIN} - 1 dB |
| Spectral Re-growth (SR) | ≤ -30 dBc @ P _O ≤ P _{LIN} - 1 dB |
| Noise Power Ratio (NPR) | ≤ -19 dBc @ P _O ≤ P _{LIN} - 1 dB |

| | |
|--|-------------------|
| Input VSWR (Return Loss) | ≤ 1.3:1 (17.7 dB) |
| Output VSWR (Return Loss) | ≤ 1.3:1 (17.7 dB) |
| Load VSWR (no damage) | ≤ 2.0:1 (9.5 dB) |
| Harmonic 2 nd & 3 rd | ≤ -60 dBc |

Noise Power

| | |
|---------------------------------|---------------------------------|
| Transmit Band (T _x) | ≤ -70 dBW/4KHz |
| Receive Band (R _x) | ≤ -150 dBW/4KHz (≤ 21.2 GHz) |

| | |
|---------------------------------|---|
| Spurious @ P _o ≤ MLP | ≤ -60 dBc |
| Residual AM | ≤ -50 dBc, f < 10KHz ≤ -20(1.5+LOG(frequency KHz))dBc, f = 10KHz to 500KHz ≤ -85 dBc >500KHz |
| Phase Noise | 10 dB below IESS requirement ≤ - 50 dBc, AC fundamental ≤ - 47 dBc, Sum of all spurs |

Group Delay (any 80 MHz)

| | |
|-----------|-----------------------------------|
| Linear | 0.01 nsec/MHz, max |
| Parabolic | 0.005 nsec/MHz ² , max |
| Ripple | 0.5 nsec/Peak-Peak, max |

Prime Power:

| | |
|-------------------|--|
| AC Input Voltage | 200-240 VAC ± 10%, single phase 50-60 Hz ± 5% |
| Full Load Current | 6.8 A max @ 200 VAC |
| Power Consumption | 1100 VA typical 1400 VA maximum |
| Power Factor | 0.98 typical 0.96 minimum |

Environmental:

| | |
|---------------------|--|
| Ambient Temperature | -40°C to +60°C |
| Relative Humidity | 100% condensing |
| Altitude | 12,000 ft. with standard adiabatic de- rating of 2°C/1000 ft., operating 50,000 ft., non-operating |
| Shock | 15 g peak, 11mSec, 1/2 sine |
| Vibration | 3.2 g rms, 10-500 Hz |
| Acoustic Noise | 65 dBA @ ≥3 ft. from amplifier |
| Solar Gain | 1120 2/m ² |

Mechanical:

| | |
|---------------|------------------------------|
| Dimensions | Request outline |
| Length | 52 cm |
| Width | 26 cm |
| Height | 26 cm |
| Weight | 21 kg typical |
| RF Input | WR-42 |
| RF Output | WR-42 |
| RF Sample | 2.9mm SMA Female |
| AC Input | Amphenol C016 20C003 200 12 |
| Ethernet | RJF71B (IP67 RJ45 Connector) |
| M&C Connector | PT07E18-32S (MS3114E-18-32S) |

Specification subject to change without notice